

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number  
WO 01/16427 A1

(51) International Patent Classification<sup>7</sup>: D21H 23/48, B05C 5/02

(21) International Application Number: PCT/FI00/00746

(22) International Filing Date:  
1 September 2000 (01.09.2000)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:  
19991863 1 September 1999 (01.09.1999) FI

(71) Applicant (for all designated States except US): VALMET CORPORATION [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KIIHA, Timo [FI/US]; 25 Bluemound Ct., Apt. 6, Appleton, WI 54914 (US). KOSKINEN, Jukka [FI/FI]; Vehkatie 89, FIN-04400 Järvenpää (FI).

(74) Agent: SEPPO LAINE OY; Itämerenkatu 3 B, FIN-00180 Helsinki (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CURTAIN COATER AND METHOD FOR CURTAIN COATING

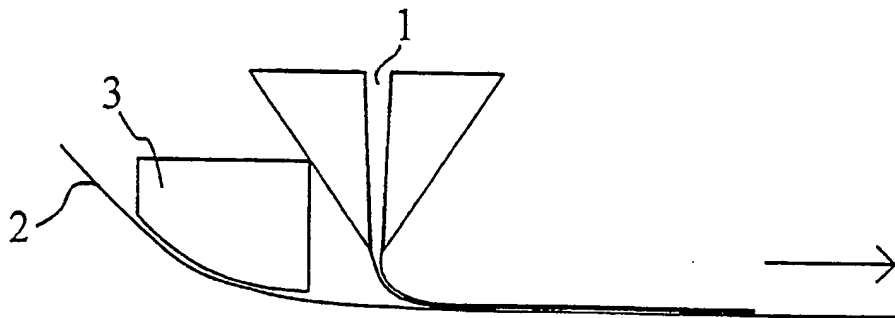

(57) Abstract: The present invention relates to a curtain coater and a curtain-coating method for coating a moving web (2) of paper or board. The curtain coater comprises an applicator nozzle (1) located above the web (2) to be coated so as to apply the coating mix therefrom to the surface of the web (2) in the form of a continuous curtain extending uniformly over the cross-machine width of the web (2). The boundary air layer traveling on the surface of the web (2) is removed by a doctoring means (3) which is located upstream in the travel direction of the web (2) in front of the impingement point of the coating mix curtain on the surface of the web (2) and is further located on the same side of the web (2) as the applicator nozzle (1).

WO 01/16427 A1

## Curtain coater and method for curtain coating

The present invention relates to curtain coaters according to the preambles of claims 1 and 2 and to curtain-coating methods according to the preambles of claims 11 and 12.

In a curtain coater, the coating mix is applied to the surface of a moving web of paper or board, generally from a nozzle extending over the full cross-machine width of the web and located above the web being coated, whereby the coating mix can fall onto the web surface as curtain-like shower. Curtain coating is categorized as a noncontacting coating method, wherein the applicator itself makes no contact with the web being coated, but instead, the coating mix is applied to the web surface in the form of a free-falling curtain of coating mix. The technique of curtain coating is described, e.g., in publication DE 196 22 080.

During its travel, a moving web gathers a thin boundary layer of air that moves along with the web. In curtain coaters, the momentum of the coating mix applied to the web surface is small as compared to the momentum of the coating mix amount directed from a jet applicator, for instance, which means that the boundary air layer traveling on the web surface can easily scatter the curtain of coating mix flowing from the nozzle of a curtain coater thus making the applied coating layer uneven. With higher web speeds in the coater station, the problem is accentuated due to the faster speed of the boundary air layer and its higher momentum. Hence, the control of the

boundary air layer behavior at higher web speeds becomes one of the most significant factors affecting the runnability of a curtain coater.

- 5 The problem associated with the boundary air layer can be diminished by way of, e.g., making the height of the falling curtain of coating mix larger thereby increasing its falling velocity or by increasing the amount of coating being applied, whereby the momentum of the coating
- 10 mix curtain is increased and the falling curtain can more readily penetrate through the boundary air layer traveling on the web surface. However, it is generally not possible to make the falling height of the coating mix curtain sufficiently large because the coating mix
- 15 curtain begins to converge and separate into streamlets with a larger falling height. Moreover, the increase of the amount of the applied coating mix necessitates doctoring away the excess coating from the web surface.
- 20 It is an object of the present invention to provide an entirely novel type of curtain coater and curtain-coating method offering an essential improvement in the reduction of the amount of boundary air penetration to the application zone of a curtain coater.
- 25
- The goal of the invention is attained by way of placing a doctoring means upstream in front of the application point in the travel direction of the web being coated, the device serving to remove the boundary air layer from
- 30 the surface of the traveling web. The purpose of the doctoring means is to bring about a significant reduction in the amount of the entrained air traveling along with

the web to the application zone. In one embodiment of the invention, the amount of the boundary air coming to the application zone is reduced by means of a suction nozzle cooperating with the air-doctoring element, whereby the  
5 boundary air layer is removed via the suction nozzle by a vacuum. Additionally, the adherence of the coating mix curtain to the web surface can be augmented by means of a gas-injection nozzle mounted downstream after the applicator nozzle in the travel direction of the web, whereby  
10 a gas jet can be directed from the gas-injection nozzle toward the coating mix curtain. Hereby, the combined momentum of the coating mix curtain and the gas jet becomes sufficiently energetic to force the coating mix to penetrate through the boundary air layer traveling on  
15 the web surface.

More specifically, the curtain coaters according to the invention are characterized by what is stated in the characterizing part of claims 1 and 2.

20 Furthermore, the curtain-coating method according to the invention are characterized by what is stated in the characterizing part of claims 11 and 12.

25 The invention offers significant benefits.

In a curtain coater according to the invention, the amount of boundary air traveling on the web being coated to the application zone can be reduced significantly as  
30 compared with conventional curtain coaters, whereby the coat quality and web runnability in the coater are improved. The web speed in a curtain coater according to

the invention can be readily increased because the boundary air layer can be removed effectively from the surface of the running web prior to application.

5 In the following, the invention will be examined in greater detail by making reference to the appended drawings in which

FIG. 1 shows schematically a cross-sectional side view of  
10 a conventional curtain coater; and

FIGS. 2-7 show schematically cross-sectional side views of different embodiments of curtain coaters according to the invention.

15

Referring to FIG. 1, the conventional curtain coater shown therein comprises an applicator nozzle 1 placed above a web 2 and extending in the cross-machine direction above the web 2 so as to permit application of the coating mix therefrom to the surface of the moving web 2.  
20 The travel direction of the web 2 is designated by an arrow. The boundary air layer traveling on the surface of the moving web 2 tends to deflect the curtain of coating mix being applied from the nozzle 1 in the travel direction of the moving web 2. At a sufficiently high travel  
25 speed of the web, the steady flow of the coating mix curtain is disturbed and a portion of the applied coating mix is blown along with the boundary air in the travel direction of the web 1, whereby certain areas on the  
30 surface of the web 2 may remain entirely uncoated.

In FIG. 2 is shown an embodiment of a curtain coater,

wherein there is located upstream in front of the application zoned formed its applicator nozzle 1, upstream in the travel direction of the web 2, a doctoring means 3 having a curved contour and extending over the cross-machine width of the web 2 so as to scatter the boundary air layer traveling on the surface of moving web 2 before the air layer can reach the application zone and cause there problems in the coat quality. The doctoring means 3 is disposed so that its curved contour is above the surface of the web 2. Generally, between the moving web 2 and the doctoring means 3 is formed a boundary air layer, the thickness of which is determined, among other factors, by the speed of the web 2 and the radius of curvature on the curved contour of the doctoring means. Typically, the thickness of the air layer remaining between the web 2 and the curved contour of the doctoring means 3 is in the range of 0-500  $\mu\text{m}$ . The end point of the curved contour of the doctoring means 3 facing the web 2 is advantageously placed as close as possible to the starting point of the application zone under the nozzle 1, since a new layer of boundary air will be rapidly regenerated over a free length of the web downstream from the doctoring means 3. In practice, the boundary air layer can reach its original thickness within 50 mm of web travel.

In contrast to the arrangement of FIG. 2, the embodiment shown in FIG. 3 has the doctoring means 3 complemented with a suction channel 4 extending over the cross-machine width of the web 2 and having its inlet opening 7 located at the rear part of the doctoring means 3. In this fashion, the boundary air layer traveling on the surface

of the moving web 2 can be sucked into the suction channel 4.

5 In FIG. 4 is shown an arrangement wherein the inlet opening 7 of the suction channel 4 is adapted on the curved surface of the doctoring means 3 facing the web 2.

10 In FIG. 5 is shown an arrangement wherein there is placed upstream in front of the application zone of the applicator nozzle 1 a doctor bar 3 so that the bar makes a contact with the moving web 2 thus preventing the boundary air layer traveling on the moving web from reaching the application zone.

15 In FIG. 6 is shown an embodiment wherein there is placed downstream after the applicator nozzle 1 in the travel direction of the moving web 2 a gas-injection nozzle 5 extending over the cross-machine width of the web and adapted to direct a gas jet toward the coating mix curtain falling from the applicator nozzle. In the context  
20 of the present invention, the term gas is used when reference is made to any substance occurring in a gas phase including air, other gases and steam. When the combined momentum of the gas jet directed from the gas-injection nozzle 5 and the falling curtain of coating mix  
25 is sufficiently large as compared with the momentum of the boundary air layer traveling on the surface of the moving web 2, the coating mix curtain can unobstructedly adhere to the surface of the web 2. The streams flowing  
30 out from the applicator nozzle 1 and the gas-injection nozzle 5 are aligned to meet with each other before the coating mix curtain impinges on the web 2. By altering

the operating pressure of the gas-injection nozzle 5, the adherence of the coating mix layer to the surface of the web 2 can be controlled.

5 In FIG. 7 is shown an embodiment different from that of FIG. 6 by having a doctoring means 3 added upstream in front of the applicator nozzle 1 in the travel direction of the web 2 so as to remove the boundary air layer from the surface of the moving web 2. Herein, the doctoring  
10 means 3 serves to remove a portion of the boundary air layer, while the gas-injection nozzle 5 assures unobstructed adherence of the coating mix curtain to the surface of the web 2.

15 In addition to those described above, the invention may have alternative embodiments.

A rotary or stationary small roll can be used as the doctoring means 3. Also different modifications of the  
20 above-described exemplifying embodiments may be contemplated. For instance, the doctoring means 3 used in the embodiment of FIG. 7 can be complemented when necessary with the suction nozzles 4 used in the embodiments of FIGS. 3 and 4 thus improving the efficiency of boundary  
25 air removal from the surface of the web 2.



**Claims:**

1. Curtain coater for coating a moving web (2) of paper or board, the curtain coater comprising an applicator  
5 nozzle (1) located above the web (2) to be coated so as to apply the coating mix therefrom to the surface of the web (2) in the form of a continuous curtain extending uniformly over the cross-machine width of the web (2),  
c h a r a c t e r i z e d by a doctoring means (3)  
10 serving to remove the boundary air layer traveling on the surface of the web (2) by being located upstream in the travel direction of the web (2) in front of the impingement point of the coating mix curtain on the surface of the web (2) and further being located on the same side of  
15 the web (2) as the applicator nozzle (1).
2. Curtain coater for coating a moving web (2) of paper or board, the curtain coater comprising an applicator  
20 nozzle (1) located above the web (2) to be coated so as to apply the coating mix therefrom to the surface of the web (2) in the form of a continuous curtain extending uniformly over the cross-machine width of the web (2),  
c h a r a c t e r i z e d by a gas-injection nozzle (5)  
located downstream in the travel direction of the web (2)  
25 after the applicator nozzle (1) so as to extend over the cross-machine width of the web (2) and adapted to blow gas via said gas-injection nozzle toward the coating mix curtain being applied from the applicator nozzle (1).
- 30 3. Curtain coater according to claim 1, c h a r a c -  
t e r i z e d by a gas-injection nozzle (5) located downstream in the travel direction of the web (2) after

the applicator nozzle (1) so as to extend over the cross-machine width of the web (2) and adapted to blow gas via said gas-injection nozzle toward the coating mix curtain being applied from the applicator nozzle (1).

5

4. Curtain coater according to claim 1 or 3, characterized by a suction nozzle (4) extending over the cross-machine width of the web (2) and adapted to said doctoring means (3) so as to remove by suction the boundary air layer traveling on the surface of the web (2).

10

5. Curtain coater according to claim 4, characterized in that the inlet opening (6) of the suction nozzle (4) is adapted to rear wall of the doctoring means (3).

15

6. Curtain coater according to claim 4 or 5, characterized in that the inlet opening (6) of the suction nozzle (4) is adapted to the surface of the doctoring means (3) facing the web (2).

20

7. Curtain coater according to any one of foregoing claims, characterized in that the surface of the doctoring means (3) facing the web (2) has a curved shape.

25

8. Curtain coater according to claim 7, characterized in that the distance of the web (2) from the curved surface of the doctoring means (3) is in the range of 0-500  $\mu\text{m}$ .

30

9. Curtain coater according to any one of foregoing claims, characterized in that said doctoring means (3) is a doctor bar.

5 10. Curtain coater according to any one of foregoing claims, characterized in that the distance along the surface of the web (2) from the doctoring point of said doctoring means (3) to the application point under said applicator nozzle (1) is less than 50 mm.

10

11. Curtain-coating method for coating a moving web (2) of paper or board, in which method

- 15 - the web (2) to be coated is passed to a coater station, and
- using an applicator nozzle (1) located above the web (2), the coating mix is therefrom applied to the surface of the web (2) in the form of a continuous curtain extending uniformly over the cross-machine width of the web (2),

20

characterized in that the boundary air layer traveling along with the web is removed from the surface of the web (2) facing said applicator nozzle (1) with the help of a doctoring means (3) located upstream in the travel direction of the web (2) in front of the applicator nozzle (1).

25

30 12. Curtain-coating method for coating a moving web (2) of paper or board, in which method

- the web (2) to be coated is passed to a coater station, and
- using an applicator nozzle (1) located above the web (2), the coating mix is therefrom applied to the surface of the web (2) in the form of a continuous curtain extending uniformly over the cross-machine width of the web (2),

10 c h a r a c t e r i z e d in that gas is blown toward the coating mix curtain being applied from the applicator nozzle (1) from a gas-injection nozzle (5) that is located downstream in the travel direction of the web (2) after the applicator nozzle (1) and is adapted to extend  
15 over the cross-machine width of the web (2).

13. Curtain-coating method according to claim 11, c h a r a c t e r i z e d in that gas is blown toward the coating mix curtain being applied from the applicator  
20 nozzle (1) from a gas-injection nozzle (5) that is located downstream in the travel direction of the web (2) after the applicator nozzle (1) and is adapted to extend over the cross-machine width of the web (2).

25 14. Curtain-coating method according to claim 11 or 13, c h a r a c t e r i z e d in that the boundary air layer traveling on the surface of the web (2) is removed by suction applied by a suction nozzle (4) adapted to said doctoring means (3).

1/2

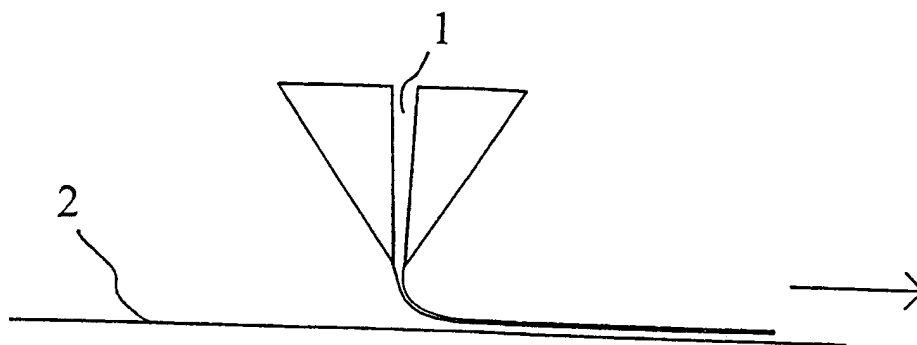


Fig. 1

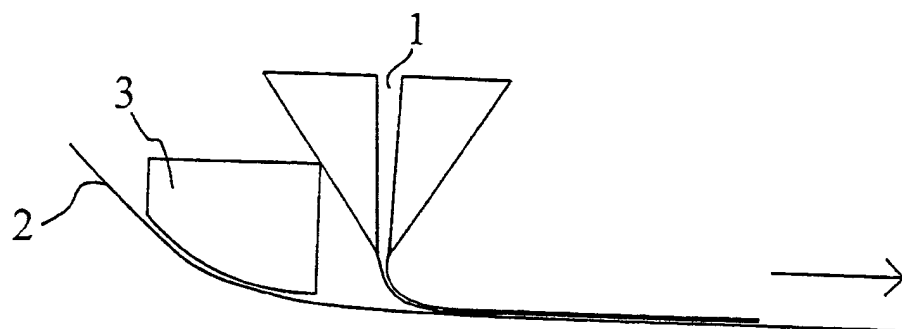


Fig. 2

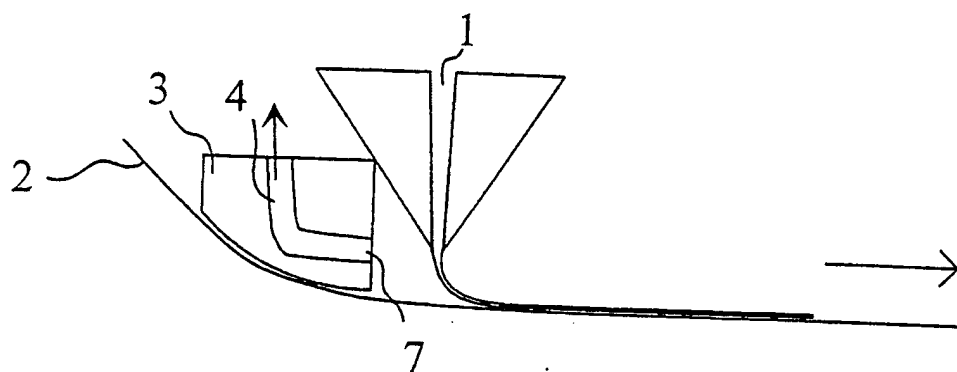


Fig. 3

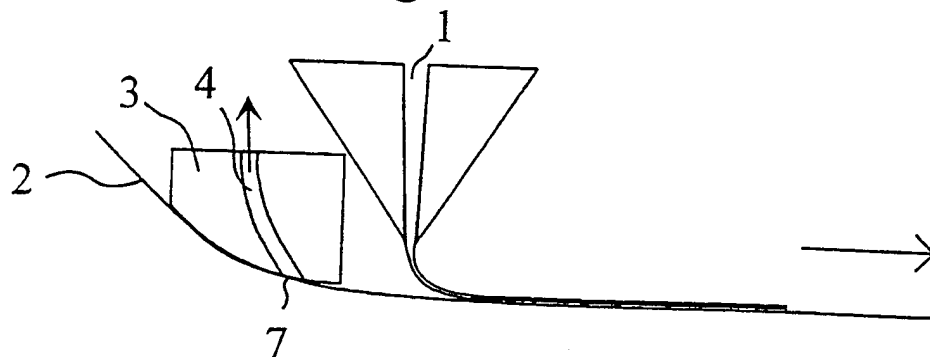


Fig. 4

2/2

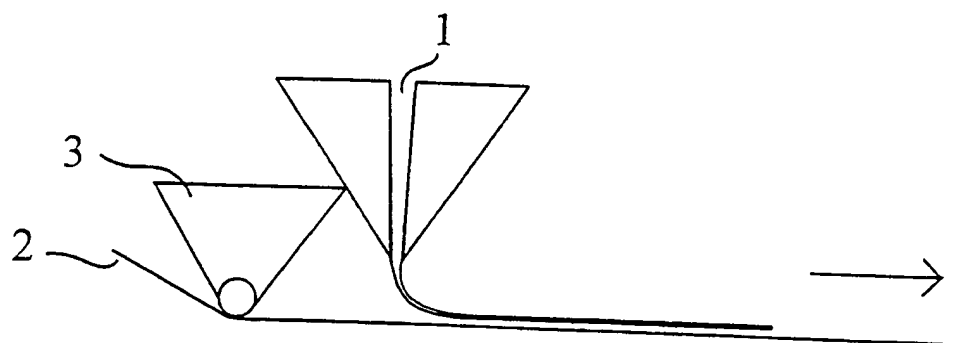


Fig. 5

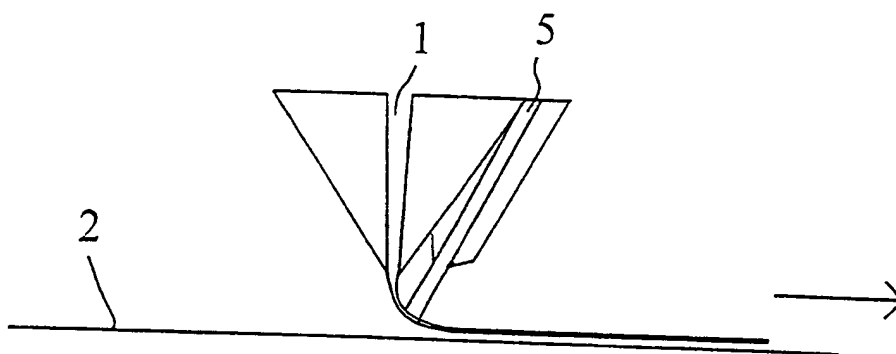


Fig. 6

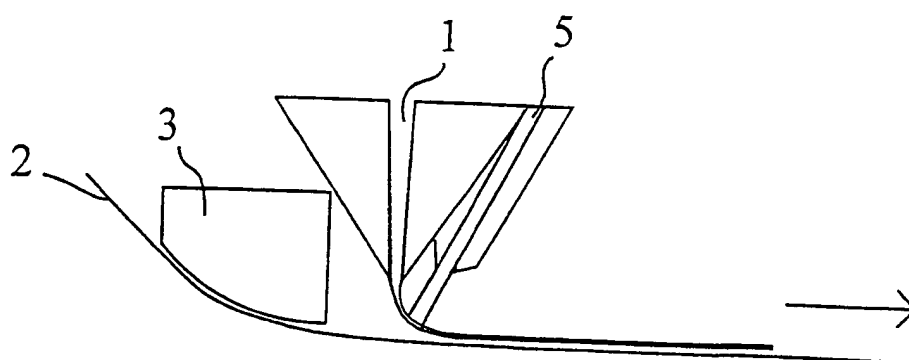


Fig. 7

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00746

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: D21H 23/48, B05C 5/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: D21H, B05C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5885659 A (SHUNSUKE TAKAHASHI ET AL), 23 March 1999 (23.03.99), column 4, line 41 - line 67 --	1,7-11
X	US 5624715 A (MARKUS GUEGGI ET AL), 29 April 1997 (29.04.97), column 1, line 60 - column 2, line 35 --	1-14
X	US 5340402 A (RUDOLF BEISSWANGER), 23 August 1994 (23.08.94), column 2, line 64 - column 3, line 60 --	1-14

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

13 November 2000

Date of mailing of the international search report

21 -11- 2000

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Barbro Nilsson/Els

Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00746

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5820674 A (CYRUS K. AIDUN), 13 October 1998 (13.10.98), column 4, line 66 - column 5, line 45	1-3,11-13
A	--	4-10,14
X	US 5688325 A (CYRUS K. AIDUN), 18 November 1997 (18.11.97), column 2, line 46 - column 3, line 50	1
A	--	2-14
A	US 5773093 A (KAMEO MITANI ET AL), 30 June 1998 (30.06.98), column 6, line 11 - line 17	1-14
	-- -----	



## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/FI 00/00746

US	5885659	A	23/03/99	DE	19735980	A	26/02/98
				JP	10057868	A	03/03/98
<hr/>							
US	5624715	A	29/04/97	EP	0704752	A	03/04/96
				JP	8173879	A	09/07/96
<hr/>							
US	5340402	A	23/08/94	CA	2089918	A	22/08/93
				DE	4205313	A,C	26/08/93
				FI	98747	B,C	30/04/97
				FI	930756	A	22/08/93
				JP	5345162	A	27/12/93
				SE	9300114	A	22/08/93
<hr/>							
US	5820674	A	13/10/98	AU	3822697	A	06/03/98
				EP	0918571	A	02/06/99
				WO	9806504	A	19/02/98
<hr/>							
US	5688325	A	18/11/97	US	5354376	A	11/10/94
				US	5366551	A	22/11/94
<hr/>							
US	5773093	A	30/06/98	DE	19622080	A	05/12/96
				JP	9047706	A	18/02/97
<hr/>							